

REVOLUTION™

Tire Changer with WalkAway™ Operation



Fully automatic changes everything



Semi-autonomous
WalkAway™ mode



2-minute service time
for all tire/wheel types



Unmatched technician
and wheel safety



HunterNet® 2
connectivity



Let the changer do the changing

REVOLUTIONIZE YOUR SERVICE

The Revolution™ tire changer has powerful and dynamic features that include automatic and autonomous operation – all designed to save time, effort, and mistakes.

PATENT PENDING

WalkAway™ operation

- ✓ 80-second unattended bead breaking and demounting process
- ✓ When paired with wheel balancing, 25%+ time savings is possible



PATENTED

Powered press arms

- ✓ Mount virtually any tire
- ✓ Powered for maximum control



PATENTED

Space saving wheel lift

- ✓ Spindle lifts tire directly into position
- ✓ Built-in wheel lift reduces overall footprint



STANDARD

Built-in camera monitors operations

- ✓ Identify incorrect operation and verify proper work
- ✓ Protect your investment



Animations and videos

- ✓ Animations train operator "on the job"
- ✓ Video training for new users
- ✓ Video library of special procedures



Status indicator lamp signals when the machine is in operation, stopped, or requires operator

Steady Green = machine operating



Flashing Green = task is completed



Steady Red = operator required



HUNTERNET
Connectivity

Award-winning tire changer empowers shop technicians with ease of use – same procedure for all tires and wheels means operator experience no longer a factor.



Embrace opportunity with...

POWERFUL, DYNAMIC FEATURES

Hunter's Revolution tire changer has industry-leading features to help any technician service the wide range of fitments that will arrive in your shop – all designed for productivity and safety.

PATENTED

Powered press arms assist on demand

- ✓ Utilize press arms only when necessary or set up to always use them
- ✓ Press arms adjust automatically
- ✓ Press arms power clockwise to prevent tire slippage



PATENTED

Bead loosening rollers are damage free

- ✓ Bead loosening rollers work best for widest variety of tires
- ✓ Procedure loosens even the most stuck on soft sidewall tires
- ✓ No risk of TPMS damage
- ✓ No risk of rim damage



PATENTED

Leverless tool head


- ✓ Demounting hook automatically deploys to catch and lift bead
- ✓ No risk of lever damage to operator or rim
- ✓ Demounting hook always avoids TPMS sensor – no risk of damage
- ✓ Mounting head designed to work with clad, raised spoke, and all unique wheel designs



PATENTED

TPMS protection is automatic

Once the operator sets the diameter and positions valve stem/TPMS, the Revolution™ tracks the sensor during mounting and demounting, avoiding costly damage.

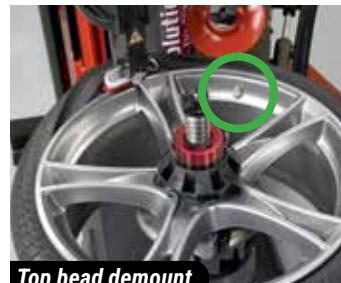

Top bead demount



Bottom bead demount



Bottom bead mount



Top bead mount

PATENT PENDING

Fast inflation saves time

InflationStation™ automatically fills tire to desired pressure.

- ✓ Operator stands back or can WalkAway™ from inflation
- ✓ 33% faster than traditional foot pedal inflation systems



Blast inflation directs large blast of air for tough bead seating.



Clamping versatility

- ✓ Powerful hydraulic clamp holds wheel secure
- ✓ Center clamp design avoids clamping damage
- ✓ Three position cone handles wide variety of wheels



Hydraulic operation is powerful and precise

- ✓ Hydraulic operation with filter means long durable life, much like industrial equipment
- ✓ Hydraulic operation means power and control
- ✓ Each tool can be moved quickly or slowly into position and held as needed



On-board training

Technique learned through making mistakes and busted knuckles is no longer a requirement for tire changing. On the Revolution™, the same process learned for one tire assembly applies to all tire assemblies.



25 on-board videos cover basic and detailed operations, special procedures, and specific accessories



"Walk Me Through It" mode includes 13 unique animations detailing each step (can be bypassed by experienced operator)

HunterNet® connectivity

New Revolution™ tire changers are HunterNet® capable. Software enables tire changers with wired or wireless internet connections to:

- ✓ Report usage data and populate trend reports
- ✓ Log individual tire changes including before and after photos
- ✓ View real-time return on investment



PATENT PENDING

Bead massage

The Revolution™ tire changer features a WalkAway™ bead massage sequence.

When combined with Road Force® match-mounting, virtually all vibrations can be eliminated.




Match-mounting

When used with a Hunter Road Force® balancer, the Revolution™ quickly and easily helps eliminate vibration problems balancers alone can't fix.



The Revolution's bead roller discs allow spinning of the tire on the rim, helping to match-mount the stiffest point on tire to the low spot on rim.

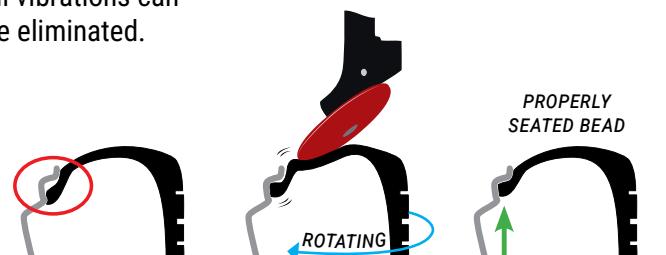

During bead massage, rollers apply force to the tire walls, assisting proper bead seating and reducing vibration concerns.

* (one or more tires has 7 lbs reduction)

Built to perform and protect

FULLY AUTOMATIC ADDS SAFETY

Fully automatic operations keep operator's hands and body safely away from the machine, reduce damage risk to rims and tires, and increase TPMS safety. Polymer tools ensure scratch free operation.

A Position safety

Operator stands back and lets the machine do the work

B Leverless safety

- ✓ No levers to hit operator
- ✓ Automatic press arms replace using levers for mounting



C Power and clamping safety

- ✓ Operator's hands stay away from the assembly
- ✓ No pinch points
- ✓ No risk of rim slipping

D Recording

Protect your investment: verify your work with camera-recorded processes

E Wheel lift safety

- ✓ Protects operator's back
- ✓ No need to lift heavy assemblies

F Inflation safety

- ✓ InflationStation™ algorithm fills to set pressure automatically – not necessary to stand on foot pedal to inflate
- ✓ Inflation controls keep operator away from assembly

G Tire and wheel safety

Automatic procedure protects rim and tire


H TPMS safety

- ✓ Monitors TPMS location constantly
- ✓ Won't allow tire to be mounted or demounted in unsafe TPMS location

WalkAway™ mode:

MULTI-TASK LIKE A PRO

Most technicians mount and balance sequentially. First demounting and mounting all four tires, then balancing all four assemblies. The Revolution™ tire changer's new WalkAway™ mode frees the operator to balance assemblies while the Revolution™ demounts another tire – unattended – saving time and adding capacity.

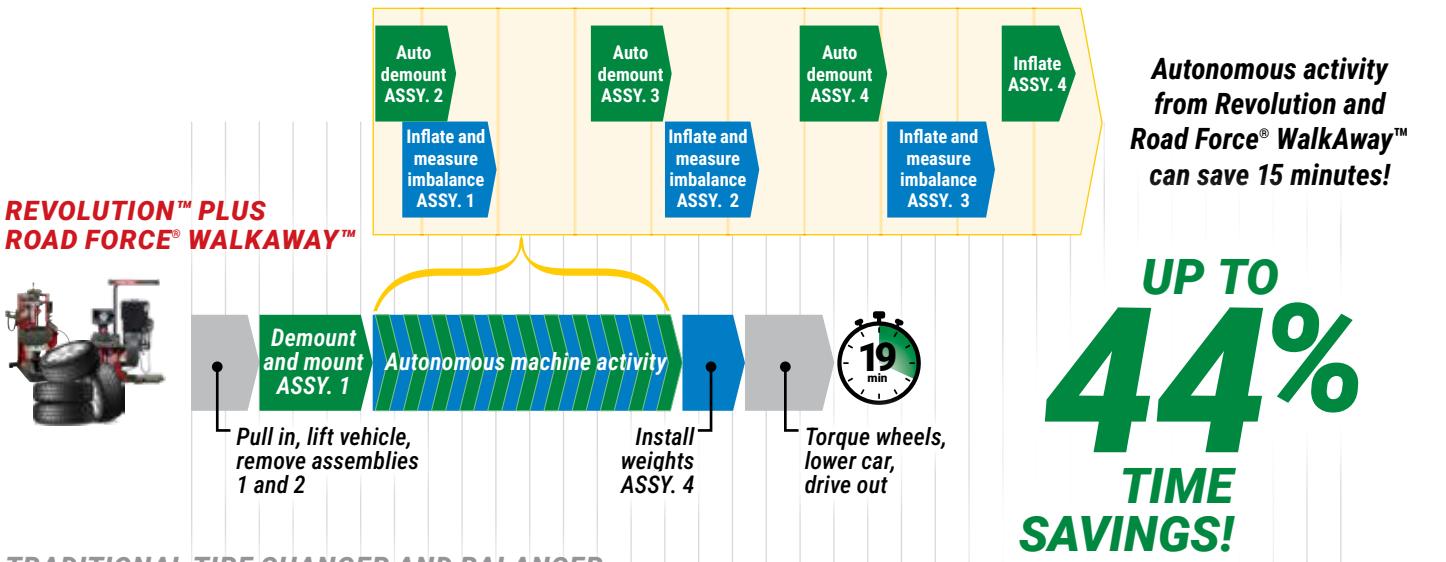

Save ~10 minutes (35%) of "door-to-door" time with autonomous activity and WalkAway™ inflation when using a standard tire changer.



SEE IT IN ACTION!




Operator's responsibilities when using WalkAway™ bead breaking and demount.



Load and unload the assembly




Orient TPMS and enable WalkAway™

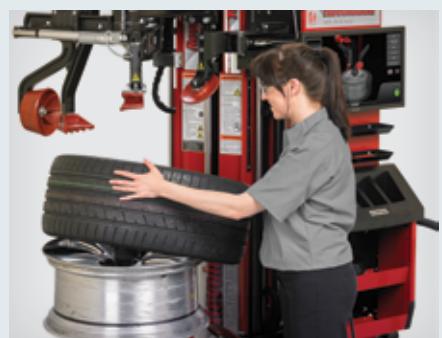

Offload old tire

Hunter's Revolution™ tire changer handles virtually all tires in the same time eliminating cycle time variations.

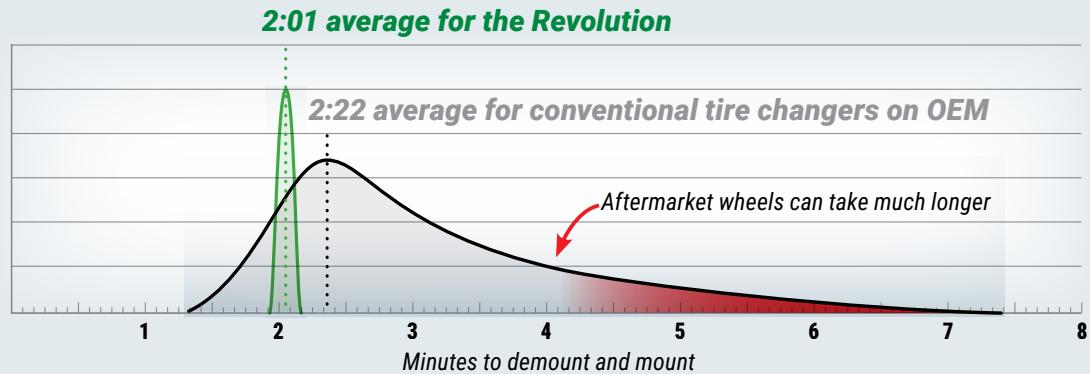

Handles all tires in the same amount of time

EQUALITY FOR ALL TIRES

Tire changing is an all day task, not a race for single tires. Assembly after assembly, the Revolution™ outpaces conventional equipment. The same fully automatic process for all tires means all tires take the same time.

15% time savings on today's tires

Time to service today's tires can be 15% faster, because tough tires don't faze the Revolution™. Add in WalkAway™ autonomous operation, and no tire changer is faster.

OEM fitments <i>Modern</i>	Low profile (under 50 series)	Traditional	Heavy assembly (over 30" assembly)	Run flat	Large diameter (over 20" wheel)
Percent of Fitments	37%	27%	14%	15%	7%
Old Equipment (skilled operator)	2:08	1:20	3:14	4:06	3:59
Revolution™ (any operator)	2:00	1:56	2:00	2:07	2:10

2:22
AVERAGE

2:01
AVERAGE

15%
IMPROVEMENT

“ With the Revolution™ tire changer, we save about 15 minutes on a set of tires. It doesn't matter if they are low-profile tires, 22s, or truck tires, you are using the same amount of effort no matter what. ”

— Charles Sullivan, Service Technician,
Eddy's Toyota, Wichita, Kansas




Train all technicians to be equipment operators

ELIMINATE EXPERIENCE GAPS

The Revolution™ can elevate your tire-changing team with differing experience levels to a team of experts.

On conventional tire machines, equipment is the tool and the technician is the tire changer.

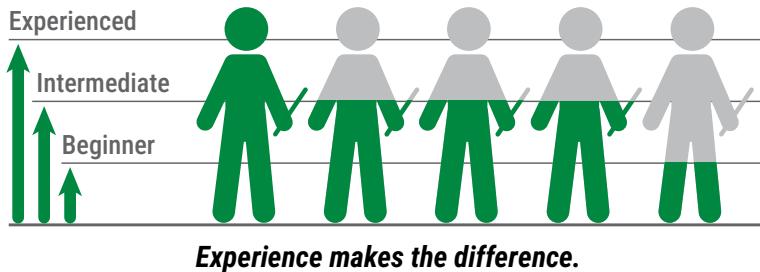

The Revolution™ is the tire changer and the technician is an equipment operator.




Simple decision-making process

With manual tire changing, the technician is constantly making critical decisions to successfully change a tire without damaging the wheel, the tire, the TPMS sensor, or even themselves.

17 *critical decisions
for conventional
tire changers*

Bead Breaking with Shovel

1. Avoid TPMS sensor
2. Set angle and position of shovel
3. Avoid rim

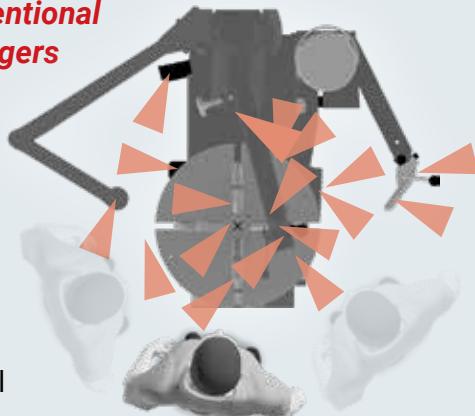

VS.

4 *critical decisions
for the Revolution™*



1. Select clamp size
2. Set TPMS sensor and rim diameter
3. Use press arms as needed
4. Set inflation pressure

The Revolution™ only requires four key decisions from the operator.

New techs are productive faster and everyone works smarter.

Clamp

4. Inside or outside
5. Use jaw protectors or not
6. Position jaws as needed

Demount

7. Set mount head
8. TPMS sensor position
9. Use lever protector or not
10. Reloosen bottom bead

Mount

11. Position mount head
12. Over/under head
13. TPMS sensor position
14. Use press arms as needed
15. Keep tire turning with rim Inflation
16. Inflate, then check pressure
17. Repeat as needed

“ The Revolution™ Tire Changer has taken user error out of the process. My guys are able to change tires quickly and safely without putting their body through the ringer, as they would using a conventional machine. The Revolution™ Tire Changer requires minimal employee training compared to a conventional machine when changing high-end tires. ”



– Brad Worley, CEO,
Worley Tire, Harrison, Arkansas



REVOLUTION™ SPECIFICATIONS

MADE
IN USA
USING THE FINEST US & GLOBAL MATERIALS

Power requirements	208-230V, 1 phase, 60Hz, 24A, NEMA 30 amp plug, L6-30P, 5,520 watts
Air supply requirements	125 ± 25 psi (8.6 ± 1.7 bar)
Mount / demount tool	Polymer self inserting leverless
Clamping type	Center w/quick clamp
Bead loosening type	Upper / lower roller
Match mounting capable	Yes
Rim diameter range	12 in. – 30 in. (305 mm – 762 mm)
Maximum tire diameter	50 in. (1,270 mm)
Maximum wheel width	15 in. (381 mm)
Drive	Variable up to 15 rpm CW / CCW Torque: 875 ft-lbs (1186 Nm)
Shipping weight	1,856 lbs (842 kg)



Embrace
opportunity,
revolutionize
your shop



Model #: TCRH

Width	Height (top of unit)	Height (top of stack light)	Depth	Weight
50 in 1,272 mm	78.5 in 1,994 mm	86.0 in 2,185 mm	78 in 1,981 mm	1,856 lbs 842 kg

Because of continuing technological advancements, specifications, models, and options are subject to change without notice.



This product is listed to UL201 Garage Equipment Standard by Intertek (ETL) Testing Laboratories. Meets national electrical code requirements for electrically powered shop equipment.

Your trusted service professionals

- ❖ 520+ independent Technical and Training Representatives in U.S. and Canada
- ❖ All Reps complete a 9-week advanced training course
- ❖ 80% of Reps live within 60 miles of most customers
- ❖ On-site product training by Hunter-certified Technical and Training Reps
- ❖ 98% of customers recommend Hunter products based on service



Contact your
local team

hunter.com/contact



Because of continuing technological advances, specifications, models and options are subject to change without notice.

HunterNet is a registered trademark of Hunter Engineering Company. Revolution, WalkAway, and InflationStation are trademarks of Hunter Engineering Company.

1025DH

Copyright © 2025, Hunter Engineering Company

HUNTER
Engineering Company
www.hunter.com

Form CB07764-00, 10/25

Supersedes Form CB07764-00, 07/24